

Contributions to mechanisms for adaptive use of mobile network resources

Olivier Mehani <olivier.mehani@nicta.com.au>



Australian Government
 Department of Broadband,
 Communications and the Digital Economy
 Australian Research Council

NICTA Members



The University of Sydney



NICTA Partners

March 21, 2011


- 1 Context, Research Scope and Approach
- 2 Application-Aware Network and Flow Management
 - Mobile-centric model of multihoming
 - Performance comparison on synthetic scenarios
- 3 Mobility-Aware Rate Control for Transports
 - Model of TFRC during handovers
 - Mobility-Aware extension to TFRC
- 4 Network measurement platforms and tools
 - RTMaps
 - OML
- 5 Towards Thesis Submission

Context: Mobile entities communicating with the rest of the world

- Mobile devices and vehicular networks
 - Mobile IP(v6)/NEMO
 - multiple access media (MCoA, flow binding)
- Heterogeneous traffic
 - M2I and M2M
 - Infotainment: web, chat, VoIP, VoD
 - Traffic efficiency and safety
 - Variable requirements
 - priority, QoS, adaptability, security
 - High-level (user/application) metrics
 - application quality (e.g. QoE), battery use, price
- Varying conditions along the end-to-end (unicast) path
 - Mobility-induced disconnections
 - Improvement/deterioration of characteristics (possibly often)
 - Network metrics: end-to-end throughput, delays, reliability

How to enable mobile communicating peers to make the best use of the network resources when they are available, and degrade gracefully when they are scarce?

- Approach: OODA loop




Context, Research Scope and Approach

Problem statement, and how to address it

How to enable mobile communicating peers to make the best use of the network resources when they are available, and degrade gracefully when they are scarce?

- Approach: OODA loop
- Contribution axes
 - Optimisation of networks selection and use
 - Improvement of rate control mechanism for mobility
 - Study of measurement platforms and tools




- ① Context, Research Scope and Approach
- ② Application-Aware Network and Flow Management
 - Mobile-centric model of multihoming
 - Performance comparison on synthetic scenarios
- ③ Mobility-Aware Rate Control for Transports
 - Model of TFRC during handovers
 - Mobility-Aware extension to TFRC
- ④ Network measurement platforms and tools
 - RTMaps
 - OML
- ⑤ Towards Thesis Submission

Application-Aware Network and Flow Management


Problem of a multihomed mobile: mix and match?

- Multiple networks, interfaces and flows (of different types)
- How to decide
 - which interface(s) to use
 - which network(s) to connect to
 - how to distribute the flows
- to maximise... what?
 - raw QoS (e.g. goodput or delays)
 - user satisfaction (QoE, e.g. application quality or price)

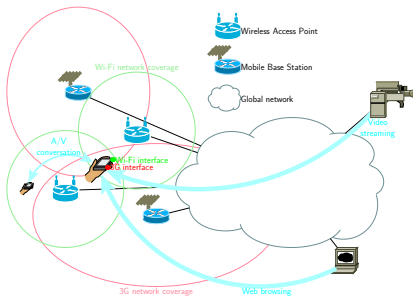

Architectural considerations

- In-stack cross-layer design too specific
- General move towards **vertical control pane** alongside the standard network stack
 - IEEE 802.21
 - CALM manager
 - ETSI ITSC management
- **No decision mechanisms specified**

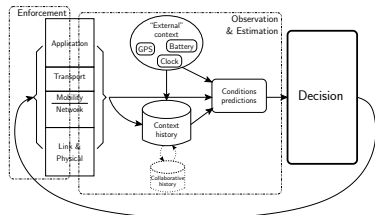

- Current decisions mechanisms
 - signal strength/SINR
 - expected/predicted network conditions
 - basic prioritising (Wi-Fi with fallback on 3G)
 - no fine grained management of multiple interfaces
- Final goal often ignored
 - actual application quality
 - battery life
 - price
- **High level metrics** may be better criteria

Application-Aware Network and Flow Management


Mobile-centric model of multihoming: Elements and relations to consider

What to consider?

- application flows
 - quality profile
 - parameters (codec, bitrate)
 - user preference
- wireless interfaces
 - power consumption
- networks
 - quality of service
 - power consumption
 - access price

What to decide?

- which interfaces to turn on
- which network to associate them with
- how to distribute flows on the uplinks
- application parameters
- transport parameters

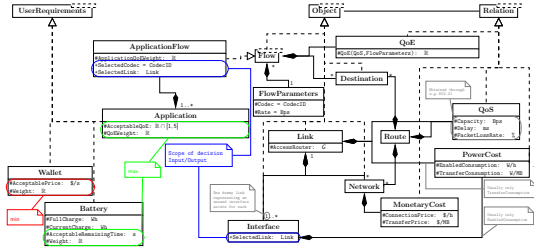

Constraints: Associations' multiplicity is 1 unless otherwise stated.

$$\sum_{f \in F} f.\text{SelectedLink} = l \quad \text{FlowParameters}(f.\text{SelectedCodec}).\text{Rate} \leq l.\text{Capacity} \quad \forall l \in L$$

$$\sum_{f \in F} f.\text{Network}(f.\text{SelectedLink}) = n, \text{Destination}(f) = d \quad \text{FlowParameters}(f.\text{SelectedCodec}).\text{Rate} \leq n.\text{Capacity} \quad \forall n \in N, d \in D$$

- set I of network interfaces
- set N of all available networks ($\text{None} \in N$)
 - $Pr(n)$, $\forall n \in N$ access price
- set $L \subseteq I \times N$ of possible links
 - link association: $\forall i \in I, n \in N \quad l_i = (i, n) \in L$
 - $C(l)$ available capacity
 - $R(l)$ round-trip time
- $P_w(x)$, $\forall x \in I \cup L$ induced power consumption
- set F of applications flows
 - type $\forall f \in F \quad t_f \in \{\text{VoIP}, \text{Video}, \text{Web}\}$
 - quality profile $QoE_f = QoE_t(p_f, c_f, d_f)$
 - $c_{\text{req}}(p)$ minimal capacity needed
 - $d_{\text{req}}(p)$ maximal acceptable delay
- $\forall f \in F, \exists i \in I \quad D_f = i$ (flow distribution)

Application-Aware Network and Flow Management

Mobile-centric model of multihoming: Objective function

- Select the interfaces to enable and the networks to connect them to, distribute the flows, and select the appropriate parameters for them.

$$\max_{\forall f \in F, p_f, D_f} \max_{\forall i \in I, l_i} \left(W_c \sum_{f \in F} Q_o E_f - W_b \sum_{i \in I} P_w(l_i) - W_p \sum_{i \in I} P_r(l_i) \right) \quad (1)$$

- Two other schemes for comparison

Single network selection

$$\max_{\forall i \in I, l_i} \left(W_c \sum_{i \in I} C(l_i) \right) \quad (2)$$

$$\text{s.t. } \begin{cases} \exists i \in I & L_i \neq \text{None}, \\ \text{and } \forall j \in I - \{i\} & L_j = \text{None}. \end{cases}$$


Load balancing on all interfaces

$$\max_{\forall f \in F, \forall i \in I, l_i} \left(W_c \sum_{i \in I} C(l_i) + W_f F_r \right) \quad (3)$$



$$F_r = \frac{(\sum_{i \in I} L_r(i))^2}{|I| \sum_{i \in I} L_r(i)^2}$$

Application-Aware Network and Flow Management


Performance comparison on synthertic scenarios

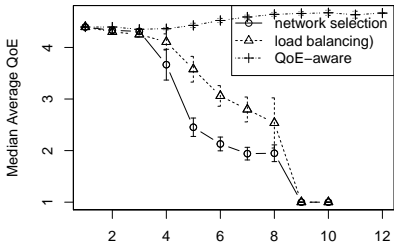

Number of active flows

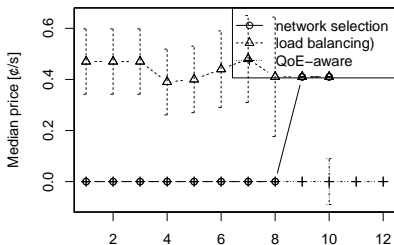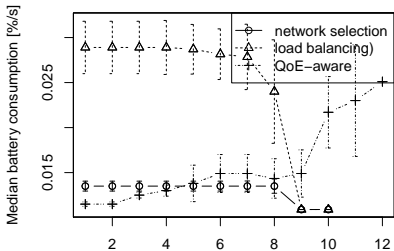

Number of active flows





TODO: sub-optimal algorithm and/or proof that the constraint solver can run in real time

- Conferences

- Olivier Mehani, Roksana Boreli, and Thierry Ernst. “Context-Adaptive Vehicular Network Optimization”. In: *ITST 2009, 9th International Conference on Intelligent Transport Systems Telecommunications*. Oct. 2009, pp. 186–191. ISBN: 1-4244-1178-5

- Planned submissions

- LCN 2011 (March 2011; editorial changes needed): Optimal bounds of the approach
- CP 2011 (April 2011; in writing): Constraint programming and modelling
- Expected: Global paper with sub-optimal algorithm to near the derived bounds

- 1 Context, Research Scope and Approach
- 2 Application-Aware Network and Flow Management
 - Mobile-centric model of multihoming
 - Performance comparison on synthetic scenarios
- 3 Mobility-Aware Rate Control for Transports
 - Model of TFRC during handovers
 - Mobility-Aware extension to TFRC
- 4 Network measurement platforms and tools
 - RTMaps
 - OML
- 5 Towards Thesis Submission

Mobility-Aware Rate Control for Transports

Problem: classical congestion control assumptions broken by mobility

- TCP-Friendly Rate Control (TFRC):


- rate-based congestion control mechanism
 - needs packets losses p and RTT R
 - $X_{\text{BPS}}(p, R) =$

$$\frac{s}{R\sqrt{\frac{4p}{3}} + t_{\text{RTO}}\sqrt{\frac{27p}{8}p(1+32p^2)}}$$

- TCP-fair congestion control
- rate-based ← more adapted to real-time streaming
- usable with Datagram Congestion Control Protocol (DCCP)
 - unreliable datagrams
 - well suited for real-time traffic over shared networks

- But

- losses during hand-off period force a rate reduction




- poor adaptability to now network characteristics
- How much resources are wasted?
- How not to?


Mobility-Aware Rate Control for Transports

Model of TFRC during handovers


- Evolution of the sending rate and the RTO




- Number of lost packets over the disconnected period



- Amount of “wasted” bandwidth upon reconnection

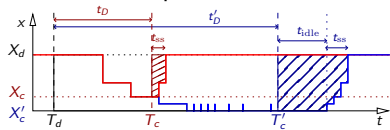

- Additional “wasted” bandwidth on higher capacity networks



Mobility-Aware Rate Control for Transports

Model of TFRC during handovers: Analytically-Derived Possible Performance Improvements

| from \ to | UMTS | 802.16 | 802.11b | 802.11g |
|---|------|--------|---------|---------|
| Packet losses | | | | |
| UMTS | 306 | 236 | 226 | 224 |
| 802.16 | 2760 | 2614 | 2614 | 2614 |
| 802.11b | 1080 | 1078 | 1078 | 1078 |
| 802.11g | 2909 | 2907 | 2907 | 2907 |
| Unused bandwidth [500 B packets] | | | | |
| UMTS | 0 | 82938 | 263 | 109541 |
| 802.16 | 0 | 471 | 155 | 1029 |
| 802.11b | 0 | 0 | 1085 | 54674 |
| 802.11g | 0 | 0 | 0 | 4699 |

▶ Compare to simulation results

Mobility-Aware Rate Control for Transports

Solution: Temporarily "Freezing" the Transport to Avoid Losses

Related work: Freeze-TCP can temporarily suspend a TCP connection

- in case of **predictable disconnections** on the receiving end
- **rate restored to previous value** when connectivity is back

Additional features: better support for mobility handoffs

sender-based freezing to account for mobile senders

slow-start-like probing for better capacity along the new path


Freeze-DCCP/TFRC mechanism **tight cooperation** between the sender and the receiver using DCCP-level options

new states to support the unfreezing phase:

- ① restoration of the rate or fallback to the newly computed value
- ② probing the path for a higher capacity


Mobility-Aware Rate Control for Transports

Mobility-Aware extension to TFRC: Additional states and options needed to support freezing

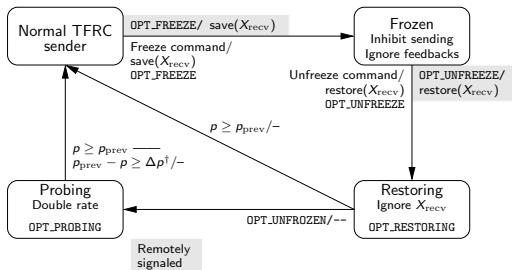

Sender
Drives the restoration
process




Receiver
Ensures synchronisation

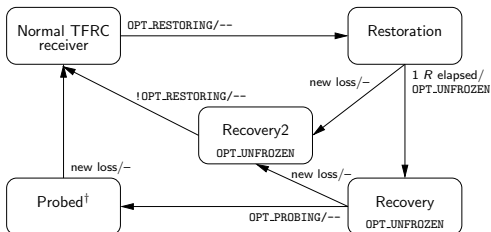

[†]When a packet is lost, the receiver computes and reports a ρ equivalent to the currently observed X_{recv} .

Mobility-Aware Rate Control for Transports

Mobility-Aware extension to TFRC: Performance of DCCP vs. Freeze-DCCP in simulations



| | to | UMTS | 802.16 | 802.11 | |
|---|----|--------|----------|---------|----------|
| from | | | | b | g |
| Packet losses (DCCP/TFRC only) | | | | | |
| UMTS | | 253.3 | 269.8 | 273.6 | 275.4 |
| 802.16 | | 1732.3 | 1734.6 | 1734.6 | 1734.6 |
| 802.11b | | 856 | 855.5 | 855.3 | 855.3 |
| 802.11g | | 2470.9 | 2470.4 | 2470.2 | 2470.1 |
| Unused bandwidth [500 B packets] | | | | | |
| UMTS | | 50.5 | 54018.05 | 2209.5 | 92156.1 |
| | | 13.4 | 3607.9 | 9342.75 | 89328.6 |
| 802.16 | | 12.45 | 1827.95 | 603.05 | 4185.75 |
| | | 5 | 591.15 | 150.9 | 1520.35 |
| 802.11b | | 150.45 | 28314 | 2101.75 | 57970.65 |
| | | 0 | 15278 | 47.45 | 1045.05 |
| 802.11g | | 42.5 | 2104.3 | 943.4 | 4313 |
| | | 0 | 7172.75 | 46.5 | 188.45 |

◀ Compare to analytical predictions

● Conferences

- Olivier Mehani and Roksana Boreli. "Adapting TFRC to Mobile Networks with Frequent Disconnections". In: *CoNEXT 2008, 4th ACM International Conference on emerging Networking EXperiments and Technologies*. Dec. 2008. ISBN: 978-1-60558-210-8. DOI: 10.1145/1544012.1544049
- Olivier Mehani, Roksana Boreli, and Thierry Ernst. "Analysis of TFRC in Disconnected Scenarios and Performance Improvements with Freeze-DCCP". In: *MobiArch 2009, 4th International Workshop on Mobility in the Evolving Internet Architecture*. June 2009. ISBN: 978-1-60558-688-5/09/06
- Olivier Mehani et al. "Mobile Multimedia Streaming Improvements with Freeze-DCCP". In: *MobiCom 2010, 16th Annual International Conference on Mobile Computing and Networking, Demonstration Session*. Sept. 2010

● Software

- *ns-2* and Linux 2.6 implementations of Freeze-DCCP/TFRC
- *ns-2* and Linux 2.6 implementations of Freeze-TCP

- 1 Context, Research Scope and Approach
- 2 Application-Aware Network and Flow Management
 - Mobile-centric model of multihoming
 - Performance comparison on synthetic scenarios
- 3 Mobility-Aware Rate Control for Transports
 - Model of TFRC during handovers
 - Mobility-Aware extension to TFRC
- 4 **Network measurement platforms and tools**
 - RTMaps
 - OML
- 5 Towards Thesis Submission

Network measurement platforms and tools

Problem: importance of experiments but poor usability of measurement tools

- How to provide an environment capable of dealing with mobile and vehicular network experiment?
- Network measurements needed at several steps
 - Design of new solutions based on observations
 - Monitoring of the world in a feedback loop (e.g. OODA) to the prototype
 - Experimental performance evaluation of the proposal
- Mobile/ITS network measurements not trivial
 - many variables, quite a few uncontrollable
 - multiple specific tools with different incompatible outputs
 - results scattered across experimental machines
- Requirements for network measurement tools
 - generic multiple different experiments
 - validated confidence in the measurements
 - extensible monitor as many variables as possible



- Candidate: RTMaps
 - Rapid prototyping tool
 - Unified timestamped databases (text-based)
 - Host synchronisation over the network
 - Already used for the rest of the in-car infrastructure
- PCap.pck
 - libpcap-based RTMaps packet capture component
 - capture packets locally or forwarded by a router
 - can't keep up with 100 Mbps traffic (loses some measurements)
- Other issues
 - Need to reimplement all measurements systems from scratch
 - Resource intensive
 - Proprietary software: licensing issues, lack of portability

- Candidate: OML
 - C library
 - Unified output format (SQL databases)
 - Timing as accurate as host computer (GPS can give sub-second precision)
 - Instrumentation of already existing applications
- **Intrumented Iperf** network testing tool, and others
- More adequate for the purpose
 - No need to reimplement measurement systems
 - More easily deployed
 - Lightweight
 - Portable

Network measurement platforms and tools


OML: Validation

- Need to characterise the precision and accuracy of OML, as well as potential impact on instrumented applications
- Two starting point cases
 - Network testing with Iperf



- ANOVA: $F = 0.0016$, $p = 0.9683$, no statistically significant difference

- Network observation with libpcap



- TODO

- Conferences and journal
 - IFIP Performance 2011 (April 2011; experimental work in progress): OML as a high performance measurement library
 - Contributed to journals and conferences
 - Manabu Tsukada, Olivier Mehani, and Thierry Ernst. "Simultaneous Usage of NEMO and MANET for Vehicular Communication". In: *TridentCom 2008, 4th International Conference on Testbeds and Research Infrastructures for the Development of Networks & Communities*. Mar. 2008. ISBN: 978-963-9799-24-0
 - José Santa et al. "Assessment of VANET Multi-hop Routing over an Experimental Platform". In: *International Journal of Internet Protocol Technology* 4.3 (Sept. 2009), pp. 158–172. ISSN: 1743-8209. DOI: 10.1504/IJIPT.2009.028655
 - Manabu Tsukada et al. "Design and Experimental Evaluation of a Vehicular Network Based on NEMO and MANET". In: *EURASIP Journal on Advances in Signal Processing* 2010 (Sept. 2010), pp. 1–18. DOI: 10.1155/2010/656407
- Software
 - RTMaps network monitoring package
 - OML-enabled IPerf, WiMAX (Unwired) monitor
 - Contributions to the OML codebase

- 1 Context, Research Scope and Approach
- 2 Application-Aware Network and Flow Management
 - Mobile-centric model of multihoming
 - Performance comparison on synthetic scenarios
- 3 Mobility-Aware Rate Control for Transports
 - Model of TFRC during handovers
 - Mobility-Aware extension to TFRC
- 4 Network measurement platforms and tools
 - RTMaps
 - OML
- 5 Towards Thesis Submission

Courses completion:

Advanced Networking (TELE9756) 6 UNSW credits, 33 contact hours, assessment result: 93%

Nicta Short Courses 2 UNSW credits and 21 contact hours each,

- Network Simulation, assessment result: 95%
- Network Analysis, assessment result: 100%

Security Engineering (COMP9441) 6 UNSW credits, 60 contact hours, assessment result: 83%

Engineering Postgraduate Research (GSEO9400) 3 UNSW credits, 21 contact hours

Universities requirements:

ENSMP 155/60 hours ✓

UNSW 19/18 credits ✓

- Thesis redaction completion

| Chapter | Completion | Status |
|------------------------------|------------|-----------------------|
| Introduction | 90% | full draft |
| Context/SotA | 55% | almost complete draft |
| Application-Aware Management | 25% | paper drafts |
| Mobility-Aware Transport | 75% | journal draft |
| Measurement framework | 0% | |
| Conclusion | 0% | |

- Roadmap

March OML evaluation

April CP paper

May–August dedicated writing

September **Submission**